

# CompositWood® Architectural Series 9400 Rolling Patio Door

## Installation & Operation Tips

### Recommended Guidelines to Assure Trouble-Free Operation and Performance

For use with Architectural Series 9400 Rolling Patio Door Installation Instructions

#### ✓ Delivery/Transporting/Handling

CompositWood rolling patio doors are shipped with permanent fixed panels in the master frame which cannot be removed.


For field installation, we recommend a minimum of 2 people for 2 panel unit installation. For 3 /4 panel unit installation we recommend 3 or more people because of the extreme size of those units.

#### ✓ Tools

For a complete list of tools and other details, please refer to the Architectural Series 9400 Rolling Patio Door Installation Instructions which came with the door or view them on [www.interstatebldg.com](http://www.interstatebldg.com).

#### ✓ Inspect Opening

Check that the width and depth of the sill is level in both directions. Inside the home to outside the home must be level. Use a line level on wider openings.

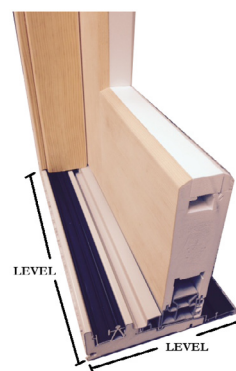

ASTRAGAL

An astragal is factory applied to 3 and 4 panel doors. It is manufactured to fit the door and **should not be removed or modified in any way**. The astragal is the best guide for proper fitting in the frame.



Top inside view of factory installed astragal



Bottom inside view of factory installed astragal

#### ✓ Adjusting Operating Panels

Manually adjust rollers with a #3 Phillips screwdriver. A screw gun is NOT recommended. When positioned in frame, panels must have equal horizontal and vertical sight lines within the frame.



**Please note:**  
Every CompositWood patio door is completely assembled and tested prior to shipping.

