




Cap Beading the Interior of Eastern Pine Veneer Sashes

This process is required to prevent any absorption of moisture through wicking at the edges of the applied pine veneer on both the Model 9800 and Model 9400 Casement and Double Hung windows.

The cap bead must be a high grade clear silicone glazing sealant. The process would need to be applied where the finished interior meets the glass.

Refer to Cap Bead instructions and follow the same procedure across the horizontal edge and 6 inches up each vertical style on all operating Master Frame and sashes.

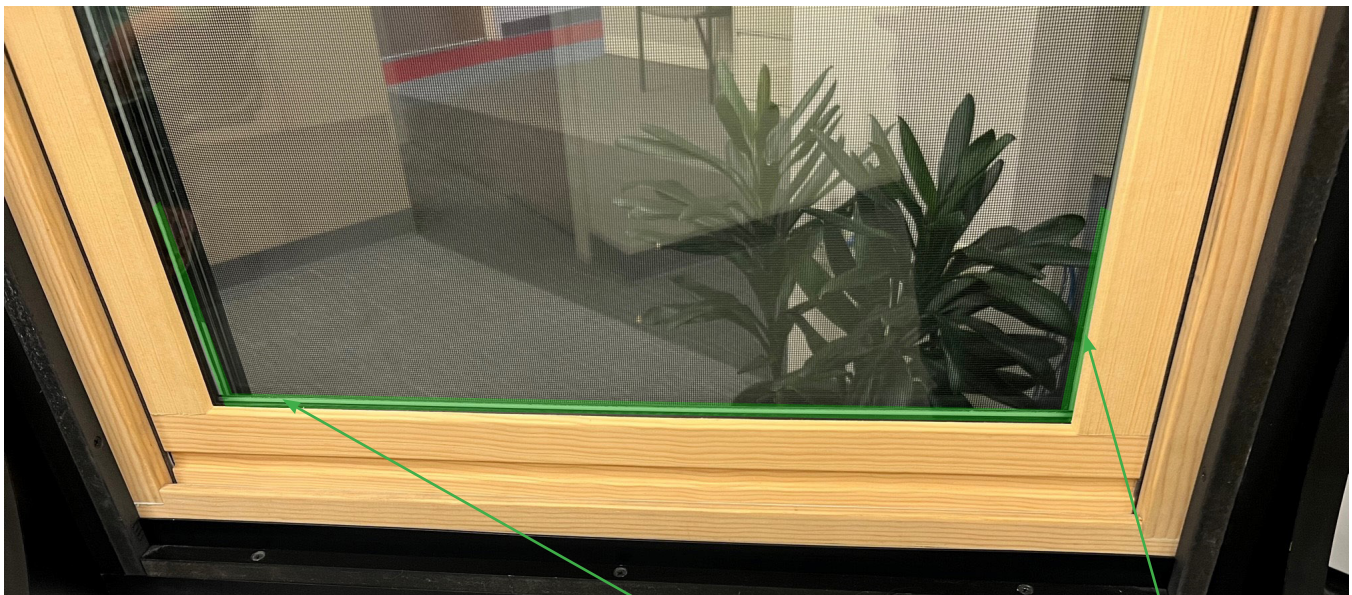

Apply sealant here